



10M VERTICAL MAST

Exceptional productivity

- Easy to use push-around mast lifts
- Compact and Lightweight
- Passes through a standard doorway
- Low maintenance





TECHNICAL DATA

10M VERTICAL MAST



DIMENSIONS	PAM21	PAM26
Max. working height	8.5m	10.0m
Max. platform height (A)	6.5m	8.0m
Platform length	0.60m	0.60m
Platform width	0.60m	0.60m
Stowed platform deck height (G)	0.65m	0.65m
Outrigger footprint (E x F)	1.74m x 1.45m	1.74m x 1.45m
Overall width (B)	0.69m	0.69m
Overall length (C)	1.20m	1.20m
Stowed height (D)	1.98m	1.98m
Guardrail height	1.10m	1.10m
Toeboard height	0.15m	0.15m

PERFORMANCE		
Platform capacity (SWL)	125kg	125kg
Max. operating wind speed	0m/s	0m/s
Raise/lower time	75/70 sec	85/81 sec
Lifts on a single charge	200	200
Wheels	250mm x 75mm. rear, 150mm. front	
Controls	Push button	

POWER		
Power source	110-230V AC or 12V DC motor	
Battery	2 x 12V 150Ah	

WEIGHT		
Gross weight (AC)	310kg	340kg
Gross weight (DC)	365kg	390kg

OUTRIGGER FOOTPRINT

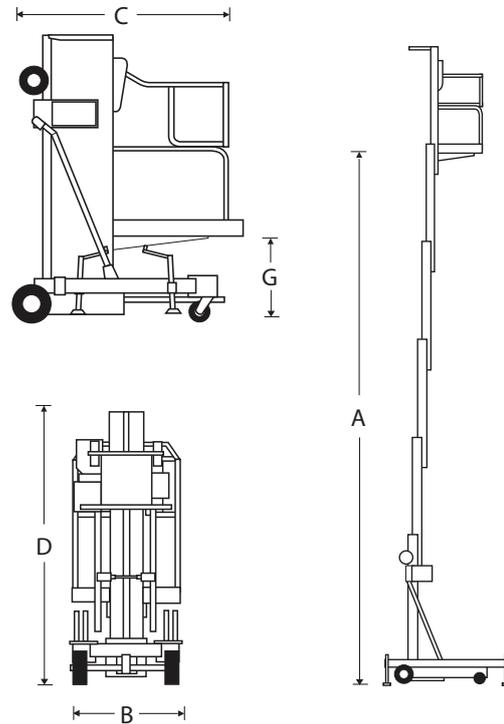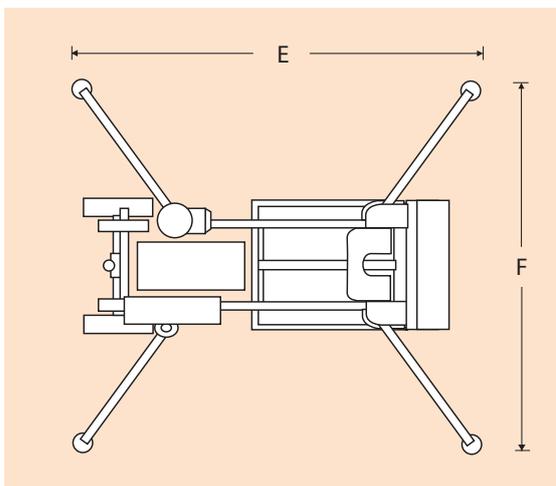

STANDARD EQUIPMENT

- Ground level duplicate controls
- Battery charge indicator
- Bubble level indicator
- Quick-set swing-out outriggers
- Outrigger interlocks
- Easy-load device for pick-up trucks
- Non-marking wheels & castors
- Integrated automatic battery charger 110-230V
- Sealed for life battery (DC)
- Removable battery box (DC)
- CE approved