STAR 8 S

GO EVERYWHERE

- High precision driving and smoothness
- Easy access to the platform: dedicated anti-slip step
- Quick machine with mobile pothole protection
- Intuitive control box with battery level indicator in platform
- Smart transportability and lifting
- Platform extension deck: + 0.4 m

WITH THE BEST VALUE FOR MONEY

- Robust machine
- 4-stage-cylinder mast: no chain, no cable
- Minimal maintenance & downtime
- Direct electric drive with maintenance-free AC motors (brushless)
- Easy access to components (2 swing out trays)
- Haulotte Activ'Screen (onboard diagnostic tool)

STAR 8 S

VERTICAL MASTS

TECHNICAL DATA

	STAR 8 S
Working height	7.95 m
Platform height	5.95 m
Lift capacity - inside	200 kg (1 Pers.)
Platform size	0.77 x 1.38 m
Platform size with extension	0.77 x 1.78 m
Ⓐ Length	1.4 m
Ⓑ Width	0.79 m
Ⓒ Height - stowed	1.98 m
Ⓓ Wheelbase	1.06 m
Ⓔ Ground clearance	6 cm
Drive speed proportional	0.5 - 4.5 km/h
Turning radius - outside	1.7 m
Tyres - non marking	318 x 108
Tilt alarm	1,5° / 3°
Power source	4 x 6 V - 180 Ah (C5)
Weight	1150 kg
Gradeability	25 %
Driveable at full height up to	5.95 m
Hydraulic system capacity	9 l

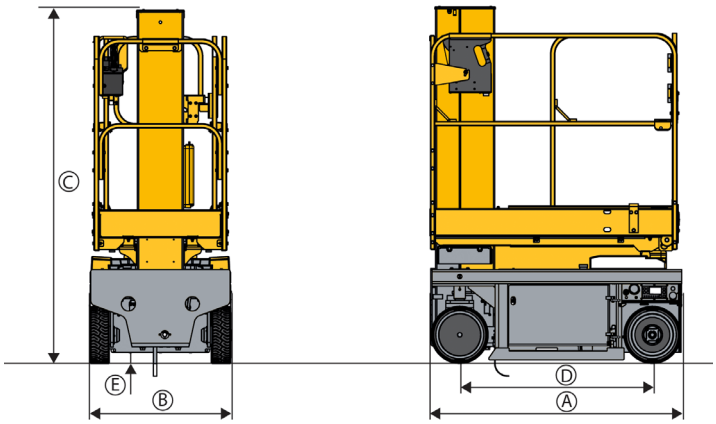

STANDARD EQUIPMENT

> Haulotte Activ'Screen
> 24 V electric drive brushless AC motors (maintenance free)
> 4 x 6 V - 180 Ah batteries
> 20 A battery charger
> Battery level indicator
> Fork lifting pockets
> Hoisting and lifting eyes
> Door entry gate with lock
> Platform extension deck: + 0.4 m
> Mobile pothole protection
> 2 rear driving wheels
> 2 front steering wheels
> Non-marking tires
> Electric brake release
> Hourmeter
> Horn
> Travel alarm
> Emergency stop
> Lowering system
> 2 control boxes (at basket and ground level)
> Mobile upper control box
> Drive speed selector on upper control box
> 2 towing hooks

OPTIONS AND ACCESSORIES

> Telematics ready
> Maintenance-free batteries
> Flashing light (standard in AUS / NZ)
> Power to platform
> Tool tray
> Upper control box cover
> Ground-fault circuit interrupter 30 mA
> Cold weather hydraulic oil
> Biodegradable hydraulic oil

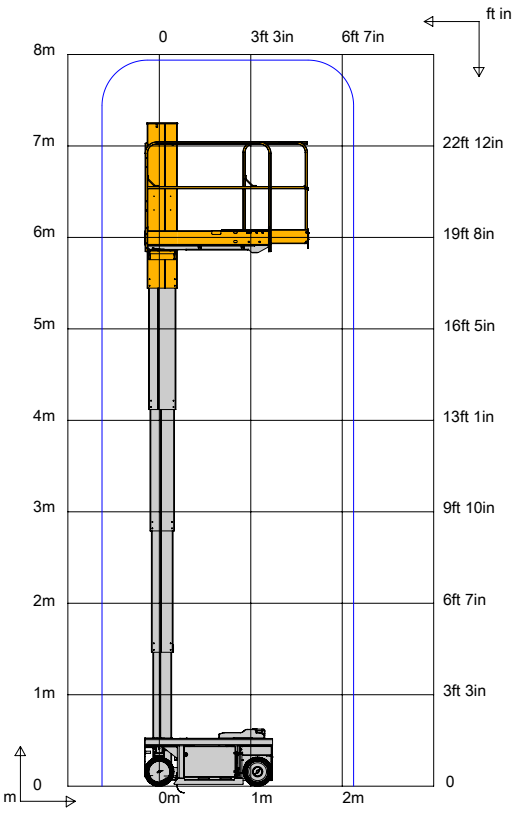

4000513980 · Non contractual document · We reserve the right to modify the technical characteristics of this document without notice · 04/2019